

N410-3

ANSI B1.20.3


DC




Material groups



CHARACTERISTICS



Technical drawing

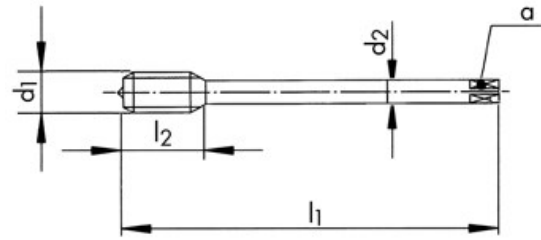

Profile sketch



Tool data

| ID | D1 | Ø d1 | P | l1 | l2 | d2 | a | |
|--------|---------|-------|-------|------|------|-------|-----|---|
| 101978 | NPTF3/8 | 17.47 | 1.411 | 90.0 | 20.0 | 12.00 | 9.0 | 5 |

Product range N410-3 NPTF3/8

| ID | D1 | Ø d1 | P | l1 | l2 | d2 | a | |
|--------|----------|-------|-------|-------|------|-------|------|---|
| 101971 | NPTF1/16 | 8.21 | 0.941 | 71.0 | 13.0 | 7.00 | 5.5 | 3 |
| 101974 | NPTF1/8 | 10.55 | 0.941 | 71.0 | 13.0 | 8.00 | 6.2 | 5 |
| 101973 | NPTF1/4 | 14.05 | 1.411 | 80.0 | 20.0 | 11.00 | 9.0 | 5 |
| 101978 | NPTF3/8 | 17.47 | 1.411 | 90.0 | 20.0 | 12.00 | 9.0 | 5 |
| 101972 | NPTF1/2 | 21.72 | 1.814 | 100.0 | 26.0 | 16.00 | 12.0 | 5 |
| 101977 | NPTF3/4 | 27.00 | 1.814 | 110.0 | 26.0 | 20.00 | 16.0 | 5 |
| 101975 | NPTF1 | 33.85 | 2.209 | 125.0 | 32.0 | 25.00 | 20.0 | 5 |