

# N470V-3

DIN EN ISO 228


DC




**Material groups**




**CHARACTERISTICS**



**Technical drawing**

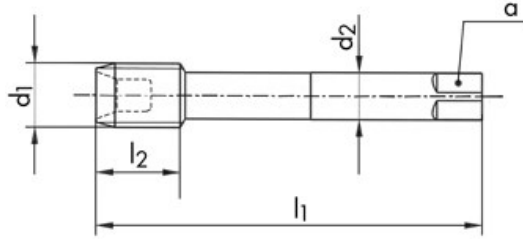

**Profile sketch**



**Tool data**

| ID     | D1   | Ø d1  | P     | l1    | l2   | d2    | a    |   |       |
|--------|------|-------|-------|-------|------|-------|------|---|-------|
| 102525 | G3/4 | 26.44 | 1.814 | 150.0 | 34.0 | 20.00 | 16.0 | 4 | 24.40 |

**Product range N470V-3 G3/4**

| ID     | D1     | Ø d1  | P     | l1    | l2   | d2    | a    |   |       |
|--------|--------|-------|-------|-------|------|-------|------|---|-------|
| 102525 | G3/4   | 26.44 | 1.814 | 150.0 | 34.0 | 20.00 | 16.0 | 4 | 24.40 |
| 102522 | G1     | 33.25 | 2.309 | 160.0 | 32.0 | 22.00 | 18.0 | 5 | 30.70 |
| 102519 | G1 1/4 | 41.91 | 2.309 | 190.0 | 38.0 | 28.00 | 22.0 | 5 | 39.30 |
| 102518 | G1 1/2 | 47.80 | 2.309 | 205.0 | 41.0 | 32.00 | 24.0 | 5 | 45.20 |
| 102524 | G2     | 59.61 | 2.309 | 220.0 | 45.0 | 36.00 | 29.0 | 6 | 57.00 |