

N1110-S

ASME B1.1


ISO 529




Material groups




CHARACTERISTICS



Technical drawing

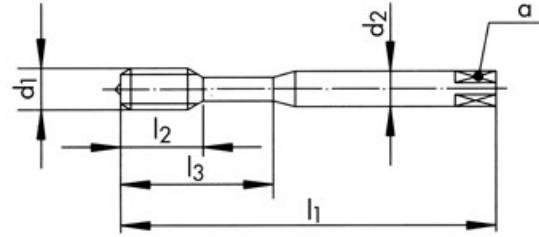

Profile sketch



Tool data

ID	D1	Ø d1	Tol	P	l1	l2	l3	d2	a		
111069	UNC3/8-16	9.53	2B	1.588	80.0	24.0	39	10.00	8.0	3	8.00

Product range N1110-S UNC3/8-16 2B

ID	D1	Ø d1	Tol	P	l1	l2	l3	d2	a		
111067	UNC2-56	2.18	2B	0.454	45.0	9.5	0	2.80	2.1	3	1.75
111068	UNC3-48	2.52	2B	0.529	45.0	9.5	0	2.80	2.1	3	2.00
111070	UNC4-40	2.85	2B	0.635	48.0	11.0	18	3.15	2.5	3	2.25
111073	UNC6-32	3.51	2B	0.794	50.0	13.0	20	3.55	2.8	3	2.75
111074	UNC8-32	4.17	2B	0.794	53.0	13.0	21	4.50	3.6	3	3.40
111065	UNC10-24	4.83	2B	1.058	58.0	16.0	25	5.00	4.0	3	3.80
111064	UNC1/4-20	6.35	2B	1.270	66.0	19.0	30	6.30	5.0	3	5.10
111072	UNC5/16-18	7.94	2B	1.411	72.0	22.0	35	8.00	6.3	3	6.50
111069	UNC3/8-16	9.53	2B	1.588	80.0	24.0	39	10.00	8.0	3	8.00