

N462V-3

DIN 13

DIN 376




Material groups



CHARACTERISTICS



Technical drawing

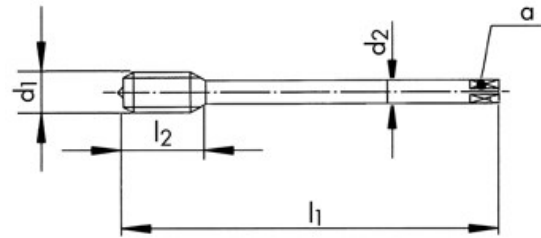

Profile sketch



Tool data

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | d2 | a | |
|--------|-----|-------|-----|-------|-------|------|-------|------|---|
| 150563 | M42 | 42.00 | 6H | 4.500 | 200.0 | 40.0 | 32.00 | 24.0 | 5 |

Product range N462V-3 M42 6H

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | d2 | a | | |
|--------|-----|-------|-----|-------|-------|------|-------|------|---|-------|
| 102512 | M12 | 12.00 | 6H | 1.750 | 110.0 | 14.0 | 9.00 | 7.0 | 3 | 10.20 |
| 102513 | M14 | 14.00 | 6H | 2.000 | 110.0 | 14.0 | 11.00 | 9.0 | 3 | 12.00 |
| 102514 | M16 | 16.00 | 6H | 2.000 | 110.0 | 18.0 | 12.00 | 9.0 | 3 | 14.00 |
| 102515 | M18 | 18.00 | 6H | 2.500 | 125.0 | 21.0 | 14.00 | 11.0 | 3 | 15.50 |
| 102516 | M20 | 20.00 | 6H | 2.500 | 140.0 | 24.0 | 16.00 | 12.0 | 4 | 17.50 |
| 102517 | M24 | 24.00 | 6H | 3.000 | 160.0 | 27.0 | 18.00 | 14.5 | 4 | 21.00 |
| 159244 | M27 | 27.00 | 6H | 3.000 | 160.0 | 27.0 | 20.00 | 16.0 | 4 | 24.00 |
| 143090 | M30 | 30.00 | 6H | 3.500 | 180.0 | 30.0 | 22.00 | 18.0 | 4 | 26.50 |
| 170670 | M33 | 33.00 | 6H | 3.500 | 180.0 | 33.0 | 25.00 | 20.0 | 4 | 0.00 |
| 142348 | M39 | 39.00 | 6H | 4.000 | 200.0 | 39.0 | 32.00 | 24.0 | 4 | 0.00 |
| 150563 | M42 | 42.00 | 6H | 4.500 | 200.0 | 40.0 | 32.00 | 24.0 | 5 | 0.00 |