

TAN50

DIN 13

DC




Material groups




CHARACTERISTICS



Technical drawing

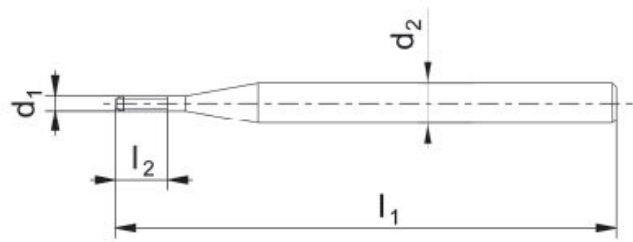

Profile sketch



Tool data

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | d2 | | |
|--------|----------|------|-----|-------|------|-----|------|---|------|
| 170393 | M1.4x0.2 | 1.40 | 4H | 0.200 | 40.0 | 4.2 | 2.50 | 3 | 1.20 |

Product range TAN50 M1.4x0.2 4H

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | d2 | a | | |
|--------|-----------|------|-----|-------|------|-----|------|-----|---|------|
| 170393 | M1.4x0.2 | 1.40 | 4H | 0.200 | 40.0 | 4.2 | 2.50 | 0.0 | 3 | 1.20 |
| 193919 | M1.6x0.2 | 1.60 | 4H | 0.200 | 40.0 | 4.8 | 2.50 | 0.0 | 3 | 1.40 |
| 193920 | M1.8x0.2 | 1.80 | 4H | 0.200 | 40.0 | 5.4 | 2.50 | 0.0 | 3 | 1.60 |
| 193922 | M2x0.25 | 2.00 | 4H | 0.250 | 45.0 | 6.0 | 2.80 | 2.1 | 3 | 1.75 |
| 193921 | M2x0.2 | 2.00 | 4H | 0.200 | 45.0 | 6.0 | 2.80 | 2.1 | 3 | 1.80 |
| 193924 | M2.2x0.25 | 2.20 | 4H | 0.250 | 45.0 | 6.6 | 2.80 | 2.1 | 3 | 1.95 |
| 193923 | M2.2x0.2 | 2.20 | 4H | 0.200 | 45.0 | 6.6 | 2.80 | 2.1 | 3 | 2.00 |
| 193926 | M2.3x0.25 | 2.30 | 4H | 0.250 | 45.0 | 6.9 | 2.80 | 2.1 | 3 | 2.05 |
| 193925 | M2.3x0.2 | 2.30 | 4H | 0.200 | 45.0 | 6.9 | 2.80 | 2.1 | 3 | 2.10 |
| 193929 | M2.5x0.35 | 2.50 | 6H | 0.350 | 50.0 | 7.5 | 2.80 | 2.1 | 3 | 2.15 |
| 193928 | M2.5x0.25 | 2.50 | 4H | 0.250 | 50.0 | 7.5 | 2.80 | 2.1 | 3 | 2.25 |
| 193927 | M2.5x0.2 | 2.50 | 4H | 0.200 | 50.0 | 7.5 | 2.80 | 2.1 | 3 | 2.30 |
| 193930 | M2.6x0.35 | 2.60 | 6H | 0.350 | 50.0 | 7.8 | 2.80 | 2.1 | 3 | 2.25 |