

FAS584VS-3

DIN 13


DC extra long




Material groups




CHARACTERISTICS



Technical drawing

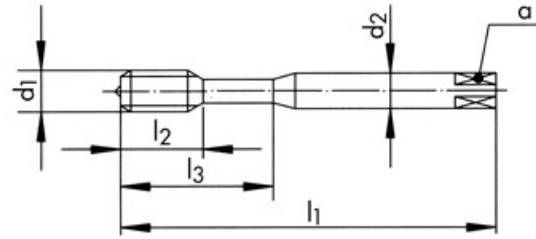

Profile sketch



Tool data

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | l3 | d2 | a | | |
|--------|----|------|-----|-------|-------|------|----|------|-----|---|------|
| 172805 | M3 | 3.00 | 6HX | 0.500 | 100.0 | 12.0 | 18 | 3.50 | 2.7 | 3 | 2.80 |

Product range FAS584VS-3 M3 6HX

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | l3 | d2 | a | | |
|--------|-----|-------|-----|-------|-------|------|----|-------|-----|---|------|
| 172805 | M3 | 3.00 | 6HX | 0.500 | 100.0 | 12.0 | 18 | 3.50 | 2.7 | 3 | 2.80 |
| 172808 | M4 | 4.00 | 6HX | 0.700 | 125.0 | 14.0 | 21 | 4.50 | 3.4 | 3 | 3.70 |
| 172811 | M5 | 5.00 | 6HX | 0.800 | 140.0 | 15.0 | 25 | 6.00 | 4.9 | 4 | 4.65 |
| 172814 | M6 | 6.00 | 6HX | 1.000 | 160.0 | 17.0 | 30 | 6.00 | 4.9 | 4 | 5.55 |
| 172817 | M8 | 8.00 | 6HX | 1.250 | 180.0 | 20.0 | 35 | 8.00 | 6.2 | 4 | 7.40 |
| 172820 | M10 | 10.00 | 6HX | 1.500 | 200.0 | 22.0 | 39 | 10.00 | 8.0 | 5 | 9.30 |