

GW3019VS

ASME B1.1


DC





Material groups



CHARACTERISTICS



Technical drawing

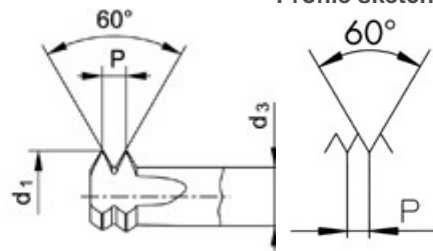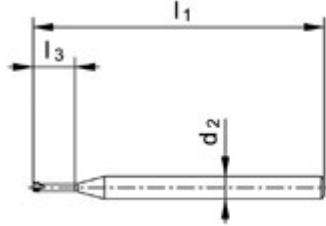

Tool data

ID	D1	Ø d1	P	l1	l2	l3	d2		
186605	UNF2-64	1.73	0.397	39.0	0.8	9.3	3.00	3	1.80

Product range GW3019VS UNF2-64

ID	D1	Ø d1	P	l1	l2	l3	d2		
175280	UNF0-80	1.15	0.318	39.0	0.6	6.6	3.00	3	1.20
175281	UNF1-72	1.44	0.353	39.0	0.7	7.9	3.00	3	1.50
186605	UNF2-64	1.73	0.397	39.0	0.8	9.3	3.00	3	1.80
172376	UNF4-48	2.23	0.529	39.0	1.1	12.1	3.00	3	2.35
169815	UNF5-44	2.51	0.577	51.0	1.2	13.8	5.00	4	2.60
186606	UNF6-40	2.77	0.635	51.0	1.3	15.2	5.00	4	2.90
175282	UNF8-36	3.35	0.706	51.0	1.4	18	5.00	4	3.50
167512	UNF10-32	3.91	0.794	51.0	1.6	20.8	5.00	4	4.05
186607	UNF12-28	4.44	0.907	51.0	1.8	23.6	5.00	4	4.60
167513	UNF1/4-28	4.95	0.907	51.0	1.8	27.1	5.00	4	5.50
175283	UNF5/16-24	5.95	1.058	75.0	2.1	34	6.00	5	6.90
175284	UNF3/8-24	7.10	1.058	83.0	2.1	40	8.00	5	8.50
186608	UNF7/16-20	7.95	1.270	83.0	2.5	47	8.00	5	9.80
186609	UNF1/2-20	9.95	1.270	95.0	2.5	54	10.00	5	11.40