

# TAN50VS

ASME B1.1

DIN 371




**Material groups**

- 11
- 12
- 13
- 14
- 32
- 63
- 71
- 72
- 73
- 74
- 92
- 93
- 94


**CHARACTERISTICS**

**VS**
**PM**
 < 2 x D
 R25
 CLASSIC
 SYNCHRO
 2 x P

**Technical drawing**

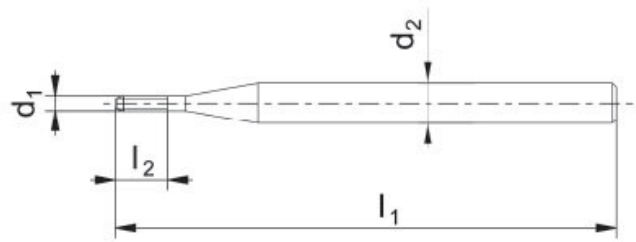

**Profile sketch**



**Tool data**

| ID     | D1      | Ø d1 | Tol | P     | l1   | l2   | d2   | a   |   |      |
|--------|---------|------|-----|-------|------|------|------|-----|---|------|
| 193966 | UNC3-48 | 2.52 | 2B  | 0.529 | 50.0 | 10.0 | 2.80 | 2.1 | 3 | 2.00 |

**Product range TAN50VS UNC3-48 2B**

| ID     | D1      | Ø d1 | Tol | P     | l1   | l2   | d2   | a   |   |      |
|--------|---------|------|-----|-------|------|------|------|-----|---|------|
| 193964 | UNC1-64 | 1.85 | 2B  | 0.397 | 40.0 | 5.6  | 2.50 | 0.0 | 3 | 1.45 |
| 193965 | UNC2-56 | 2.18 | 2B  | 0.454 | 45.0 | 9.0  | 2.80 | 2.1 | 3 | 1.75 |
| 193966 | UNC3-48 | 2.52 | 2B  | 0.529 | 50.0 | 10.0 | 2.80 | 2.1 | 3 | 2.00 |