

# GW3015VX

ASME B1.1



DC



**CHARACTERISTICS**



**Technical drawing**

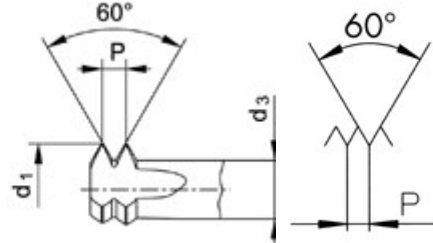

**Tool data**

ID	D1	Ø d1	P	l1	l2	l3	d2		
206463	UNF2-64	1.73	0.397	39.0	0.8	4.9	3.00	3	1.80

**Product range GW3015VX UNF2-64**

ID	D1	Ø d1	P	l1	l2	l3	d2		
206461	UNF0-80	1.15	0.318	39.0	0.6	3.5	3.00	3	1.20
206462	UNF1-72	1.44	0.353	39.0	0.7	4.2	3.00	3	1.50
206463	UNF2-64	1.73	0.397	39.0	0.8	4.9	3.00	3	1.80
206464	UNF4-48	2.23	0.529	39.0	1.1	6.4	3.00	3	2.35
206465	UNF5-44	2.51	0.577	51.0	1.2	7.4	5.00	4	2.60
206466	UNF6-40	2.77	0.635	51.0	1.3	8.2	5.00	4	2.90
206467	UNF8-36	3.35	0.706	51.0	1.4	9.7	5.00	4	3.50
206468	UNF10-32	3.91	0.794	51.0	1.6	11.1	5.00	4	4.05
206469	UNF12-28	4.44	0.907	51.0	1.8	12.7	5.00	4	4.60
206470	UNF1/4-28	4.95	0.907	51.0	1.8	14.4	5.00	4	5.50