

TL351VS-3

DIN 13


DIN 371




Material groups




CHARACTERISTICS



Technical drawing

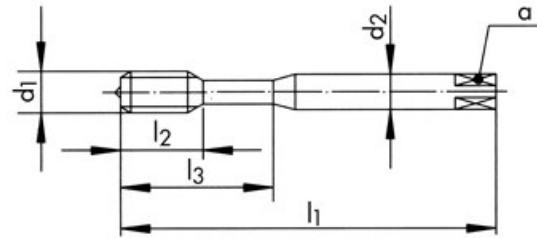

Profile sketch



Tool data

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | d2 | a | | |
|--------|----|------|-----|-------|------|------|------|-----|---|------|
| 148002 | M4 | 4.00 | 6HX | 0.700 | 63.0 | 14.0 | 4.50 | 3.4 | 3 | 3.30 |

Product range TL351VS-3 M4 6HX

| ID | D1 | Ø d1 | Tol | P | l1 | l2 | l3 | d2 | a | | |
|--------|-----|-------|-----|-------|-------|------|----|-------|-----|---|------|
| 148000 | M3 | 3.00 | 6HX | 0.500 | 56.0 | 12.0 | 0 | 3.50 | 2.7 | 3 | 2.50 |
| 152012 | M3 | 3.00 | 4HX | 0.500 | 56.0 | 12.0 | 0 | 3.50 | 2.7 | 3 | 2.50 |
| 152013 | M4 | 4.00 | 4HX | 0.700 | 63.0 | 14.0 | 0 | 4.50 | 3.4 | 3 | 3.30 |
| 148002 | M4 | 4.00 | 6HX | 0.700 | 63.0 | 14.0 | 0 | 4.50 | 3.4 | 3 | 3.30 |
| 148006 | M5 | 5.00 | 6HX | 0.800 | 70.0 | 15.0 | 0 | 6.00 | 4.9 | 3 | 4.20 |
| 152014 | M5 | 5.00 | 4HX | 0.800 | 70.0 | 15.0 | 0 | 6.00 | 4.9 | 3 | 4.20 |
| 152015 | M6 | 6.00 | 4HX | 1.000 | 80.0 | 15.0 | 23 | 6.00 | 4.9 | 3 | 5.00 |
| 148010 | M6 | 6.00 | 6HX | 1.000 | 80.0 | 15.0 | 23 | 6.00 | 4.9 | 3 | 5.00 |
| 148018 | M8 | 8.00 | 6HX | 1.250 | 90.0 | 18.0 | 29 | 8.00 | 6.2 | 3 | 6.80 |
| 152016 | M8 | 8.00 | 4HX | 1.250 | 90.0 | 18.0 | 29 | 8.00 | 6.2 | 3 | 6.80 |
| 152017 | M10 | 10.00 | 4HX | 1.500 | 100.0 | 20.0 | 33 | 10.00 | 8.0 | 3 | 8.50 |
| 148025 | M10 | 10.00 | 6HX | 1.500 | 100.0 | 20.0 | 33 | 10.00 | 8.0 | 3 | 8.50 |